

Limit Switches

Series P60

GENERAL INFORMATION


Series P60 limit switch is mounted on pneumatic actuator to show the opened or closed position of valve and give out signal. Explosion proof design is for preventing any spark to environment.

FEATURES


- Solid and compact design
- High level weather proof IP67 and explosion proof Exd CT6
- Multi-point terminal strip, standard 8 points and enough strips for connection
- Quick-set cam-Spring loaded splined cam, no need to adjust again after initial setting
- Captive cover bolts-No worry to loose bolts while cover open
- Easy mounting-NAMUR standard stainless steel shaft, ISO5211 bracket with stainless steel as standard
- Visual position indicator, with non-visual indicator type available on request

TECHNICAL DATA


Item	Standard	Option
Weather proof		IP67
Explosion proof		Exd II CT6
Temperature range		-25°C ~+85°C
Cable entry	2x3/4NPT	PT3/4, PF3/4
Terminal strips	8	9~24
Position range	0~90°	0~180°
Position indicator		Open-Yellow; Close-Red
Switches		Mechanical, proximity, magnet
Potentiometer		1KΩ(0~5KΩ, 0~10KΩ)
Current feedback		4~20mA

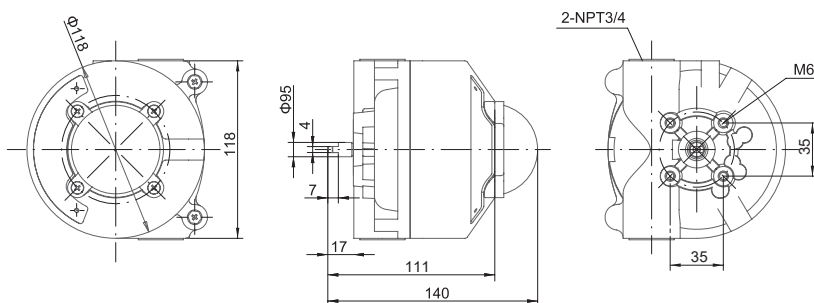

Brackets



30×80×H H=20~30



30×130×H H=30~50